


SPECIFICATIONS

| Size | Metric | British |
|-------------------------------------|--------------|---------------------|
| Max. Working Height A | 19.00m | 62ft 4.0in |
| Max. Platform Height B | 17.00m | 55ft 9in |
| Overall Length C | 3.76m | 12ft 4in |
| Overall Width D | 1.25m | 4ft 1in |
| Overall Height(Rails Up) E | 3.24m | 10ft 8in |
| Overall Height(Rails Down) F | 2.47m | 8ft 1in |
| Platform Size(Length×Width) | 3.44m×1.17m | 11ft 3in × 3ft 10in |
| Platform Extension Size G | 1.20m | 3ft 11in |
| Ground Clearance(Stowed/Raised) | 0.15m/0.025m | 6in/1in |
| Wheelbase H | 2.89m | 9ft 6in |
| Turning Radius(Inside/Outside) | 1.00m/3.50m | 3ft 3in/11ft 6in |
| Tyres | 22×9×16 | 22×9×16 |

| Performance | | |
|---------------------------------|-------------|-------------|
| S.W.L | 500kg | 1102lb |
| S.W.L On Extension | 500kg | 1102lb |
| Max. Occupants (Indoor/Outdoor) | 2/0 | 2/0 |
| Gradeability | 30% | 30% |
| Travel Speed(Stowed) | 4.5km/h | 2.80mph |
| Travel Speed(Raised) | 0.4km/h | 0.25mph |
| Max. Working Slope | X-1.5°/Y-3° | X-1.5°/Y-3° |
| Up/Down Speed | 70/76sec | 70/76sec |

| Weight | | |
|----------------|--------|---------|
| Overall Weight | 7140kg | 15741lb |

| Power | | |
|----------------|---------------|---------------|
| Hydraulic Tank | 50L | 13.2gal |
| Battery | 48V/360Ah | 48V/360Ah |
| Charger | 48V/60A | 48V/60A |
| Driving Motor | 2×32VAC/3.3kW | 2×32VAC/3.3kW |
| Lifting Motor | 48VDC/12.0kW | 48VDC/12.0kW |

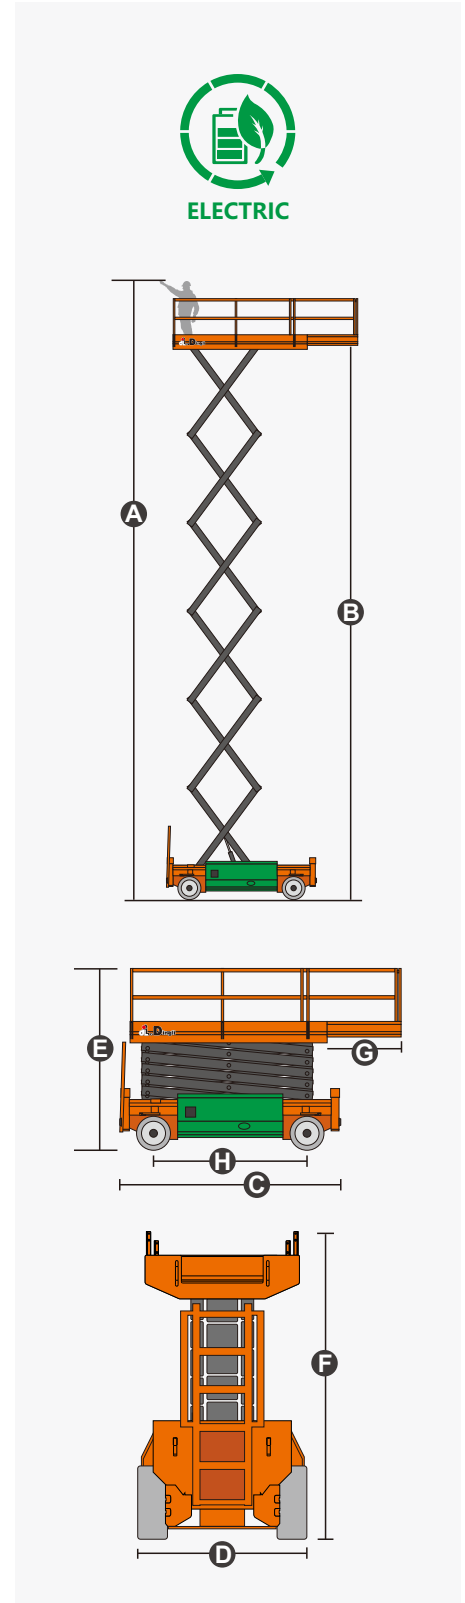

FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Solid Rubber Tyres
- Two-Wheel Drive
- Two-Wheel Steering
- Four-Wheel Braking
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road,Deqing,Zhejiang P.R.C 313219

Telephone: +86(572)8681688

E-Mail: export@cndingli.com

[Https://en.cndingli.com](https://en.cndingli.com)

Due to continuous technology updates, technical parameters are subject to change without notice. This picture book is for reference only, the actual product shall prevail. The copyright is owned by zhejiang dingli, any content may not be copied for any purpose without written permission.

2022-09

