

## **SPECIFICATIONS**


Dimension	Metric	British
Max. Working Height(Indoor) 🛕	15.70m	51ft 6in
★ Max. Working Height(Outdoor)	11.00m	36ft 1in
Max. Platform Height(Indoor)	13.70m	44ft 11in
★ Max. Platform Height(Outdoor)	9.00m	29ft 6in
Overall Length <b>©</b>	2.84m	9ft 4in
Overall Width <b>(</b>	1.39m	4ft 7in
Overall Height(Rails Up)	2.62m	8ft 7in
Overall Height(Rails Down)	2.09m	6ft 10in
Platform Size(Length ×Width)	2.64m×1.12m	8ft 8in×3ft 8in
Platform Extension Size <b>©</b>	0.90m	2ft 11in
Ground Clearance(Stowed/Raised)	0.10m/0.019m	4in/1in
Wheelbase <b>(</b>	2.24m	7ft 4in
Turning Radius(Inside/Outside)	0m/2.70m	0in/8ft 10in
Tyres	φ381×127mm	φ381×127mm

Performance		
S.W.L	350kg	771lb
S.W.L on Extension	136kg	299lb
Max. Occupants (Indoor/Outdoor)	2/0	2/0
★ Max. Occupants (Indoor/Outdoor)	2/1	2/1
Gradeability	25%	25%
Travel Speed(Stowed)	5.5km/h	3.41mph
Travel Speed(Raised)	0.8km/h	0.50mph
Max. Working Slope	X-1.5°/Y-3°	X-1.5°/Y-3°
Up/Down Speed	72/62sec	72/62sec

Weight			
Overall Weight	3530kg	7782lb	

Power		
Hydraulic Tank	20L	5.3gal
Lithium Battery	28.8V/150Ah	28.8V/150Ah
Charger	28V/30A	28V/30A
Driving Motor	2×15VAC/0.87kW	2×15VAC/0.87kW
Lifting Motor	15VAC/3.42kW	15VAC/3.42kW

Note: Parameters with "★" are optional

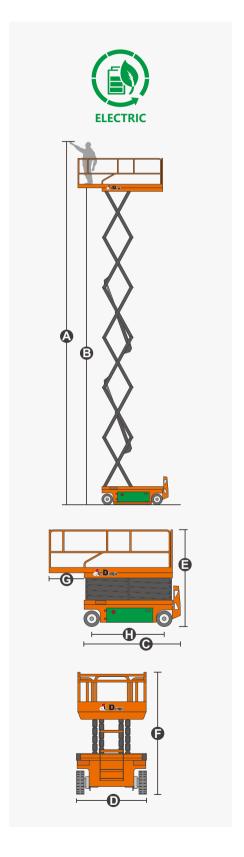





## **FEATURES**

## **Standard Items**

- Proportional Joystick Controls Tie-Down And Lifting Points
- Self-lock Gate On Platform
- Drivable At Full Height
- Non-Marking Tires
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Brake System
- Emergency Descent System
- Cylinder Holding Valve
- Onboard Diagnostic System
- Tilt Alarm
- All Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- One-Way Platform Extension Deck
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- Charging Indicator
- Manual Brake Release
- · Lanyard Attachment Point

- Platform Load Sense System
- Emergency Stop Button
- Hydraulic oil receiver
- Pure electric steering system
- · Kinetic energy recovery system



## ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











