


## **SPECIFICATIONS**

Size	Metric	British
Max. Working Height <b>A</b>	5.60m	18ft 4in
Max. Platform Height 📵	3.60m	11ft 10in
Overall Length <b>©</b>	1.46m	4ft 9in
Overall Width <b>()</b>	0.76m	2ft 6in
Overall Height(Rails Up)	2.06m	6ft 9in
Overall Height(Rails Down)	1.69m	5ft 7in
Platform Size(Length×Width)	1.29m×0.70m	4ft 3in×2ft 4in
Platform Extension Size <b>©</b>	0.60m	2ft
Ground Clearance(Stowed/Raised)	0.07m/0.015m	3in/1in
Wheelbase <b>(1)</b>	1.06m	3ft 6in
Turning Radius(Inside/Outside)	0.40m/1.55m	1ft 4in/5ft 1in
Tyres	φ305×100mm	φ305×100mm

Performance		
S.W.L	240kg	529lb
S.W.L On Extension	100kg	220lb
Max. Occupants (Indoor/Outdoor)	2/1	2/1
Gradeability	25%	25%
Travel Speed(Stowed)	4.0km/h	2.49mph
Travel Speed(Raised)	0.6km/h	0.37mph
Max. Working Slope	X-1.5°/Y-3°	X-1.5°/Y-3°
Up/Down Speed	27/20sec	27/20sec

Weight			
Overall Weight	960kg	2116lb	

wer		
draulic Tank	3L	0.8gal
ttery	24V/85Ah	24V/85Ah
arger	24V/15A	24V/15A
ving Motor	2×24VDC/0.45kW	2×24VDC/0.45kW
ting Motor	24VDC/1.2kW	24VDC/1.2kW
ting Motor	24VDC/1.2kW	24VDC/1.2

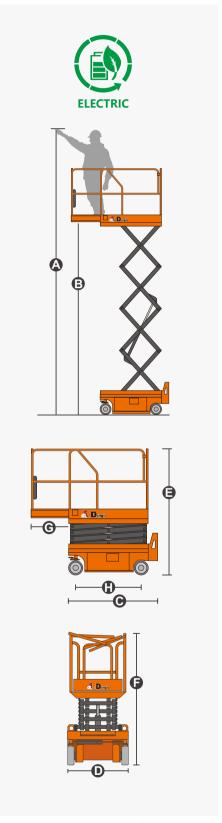

**CE EN 280** 





## **FEATURES**

## Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tyres
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- · Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button



## ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











