


SPECIFICATIONS

Metric	British
7.60m	24ft 11in
5.60m	18ft 5in
1.37m	4ft 6in
1.52m	5ft
0.81m	2ft 8in
2.01m	6ft 7in
1.65m	5ft 5in
1.37m×0.70m	4ft 6in×2ft 4in
0.60m	2ft
0.06m/0.015m	2in/1in
1.13m	3ft 8in
0.45m/1.60m	1ft 6in/5ft 3in
φ230×100mm	φ230×100mm
	7.60m 5.60m 1.37m 1.52m 0.81m 2.01m 1.65m 1.37m×0.70m 0.60m 0.06m/0.015m 1.13m 0.45m/1.60m

Performance		
S.W.L	230kg	507lb
S.W.L On Extension	113kg	249lb
Max. Occupants (Indoor/Outdoor)	2/0	2/0
Gradeability	25%	25%
Travel Speed(Stowed)	4.0km/h	2.49mph
Travel Speed(Raised)	0.6km/h	0.37mph
Max. Working Slope	X-1.5°/Y-3°	X-1.5°/Y-3°
Up/Down Speed	30/23sec	30/23sec

Weight			
Overall Weight	1300kg	2866lb	

4L	1gal
24V/115Ah	24V/115Ah
24V/15A	24V/15A
2×24VDC/0.5kW	2×24VDC/0.5kW
24VDC/2.2kW	24VDC/2.2kW
	24V/115Ah 24V/15A 2×24VDC/0.5kW

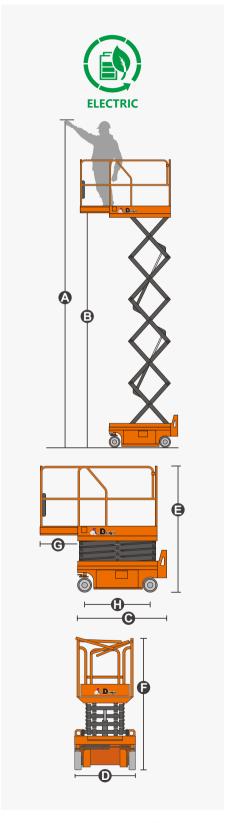

CE EN 280



Self-propelled Scissor Lifts



FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tyres
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- · Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











